



SUNBA®

305-D4X Pan Tilt Zoom Camera

Quick Installation Guide

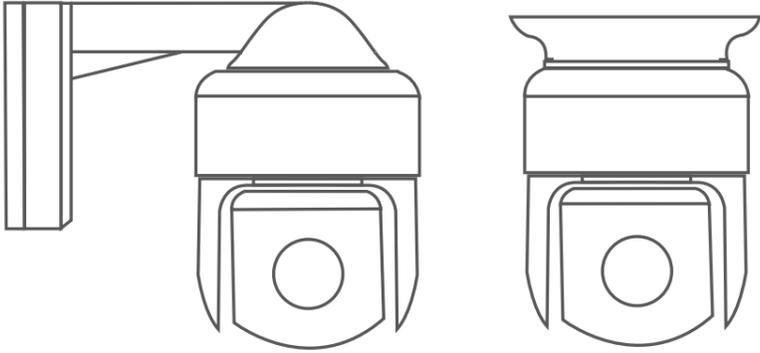

Version 2.0
2019-06

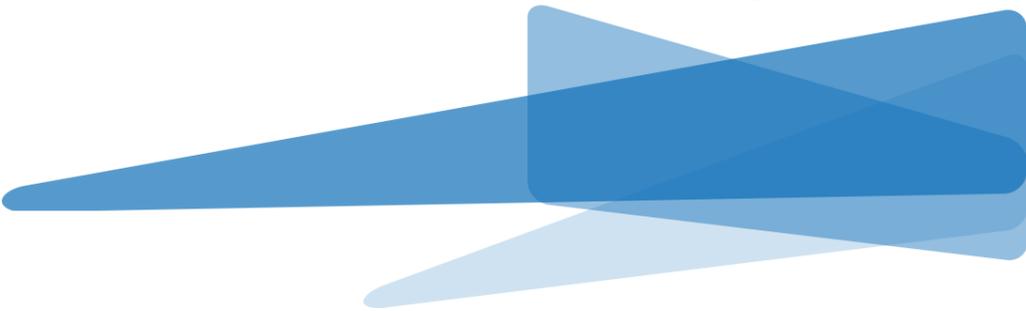

1 What's Included?




305-D4X



Ceiling Mount




Mounting Bracket



Power Pack



Supporting Resources Card



User Guide




Warning Decal


- 01 -

2 Mount Installation


Step 1. Select Mount

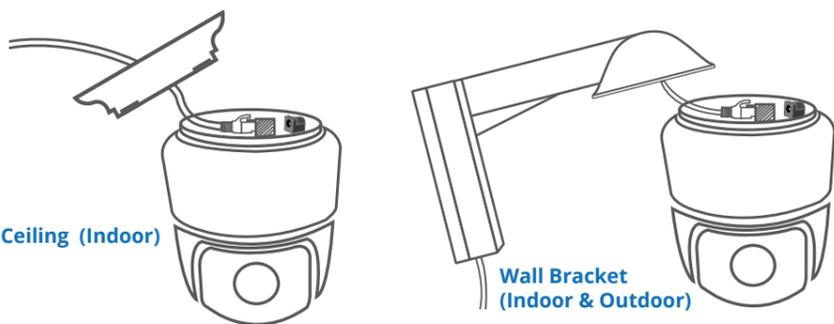

Step 2. Align with Mark "L".

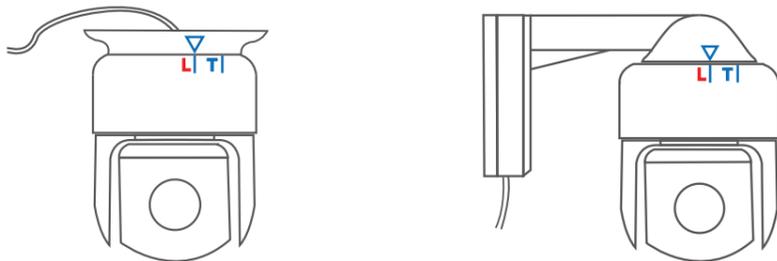



Step 3. Turn to Align with "T".

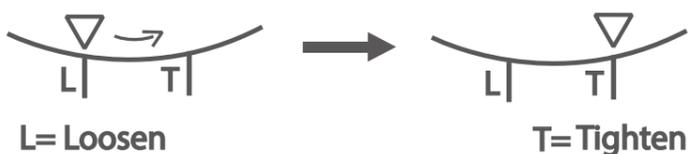

To tighten the mount, make sure the  icon on the mount is aligned with the "L" mark on the camera top. Then gradually turn the mount counter-clockwise so that  is now aligned to "T".

- 02 -

3 Connection Diagram

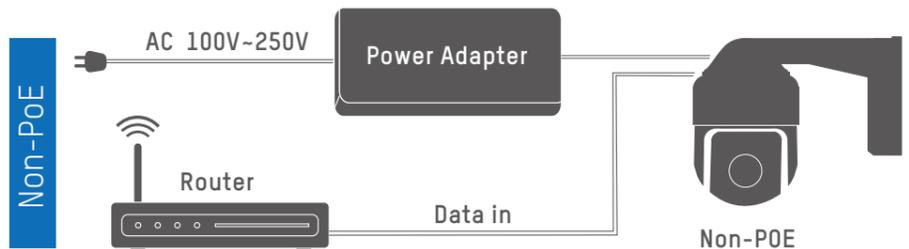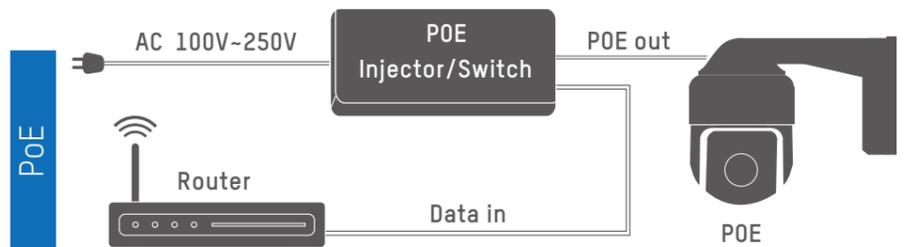

4 Live View with Smartphone

video tutorial smartphone.sunba.net

iSunba



Android




APP
DOWNLOAD




iOS

- 03 -

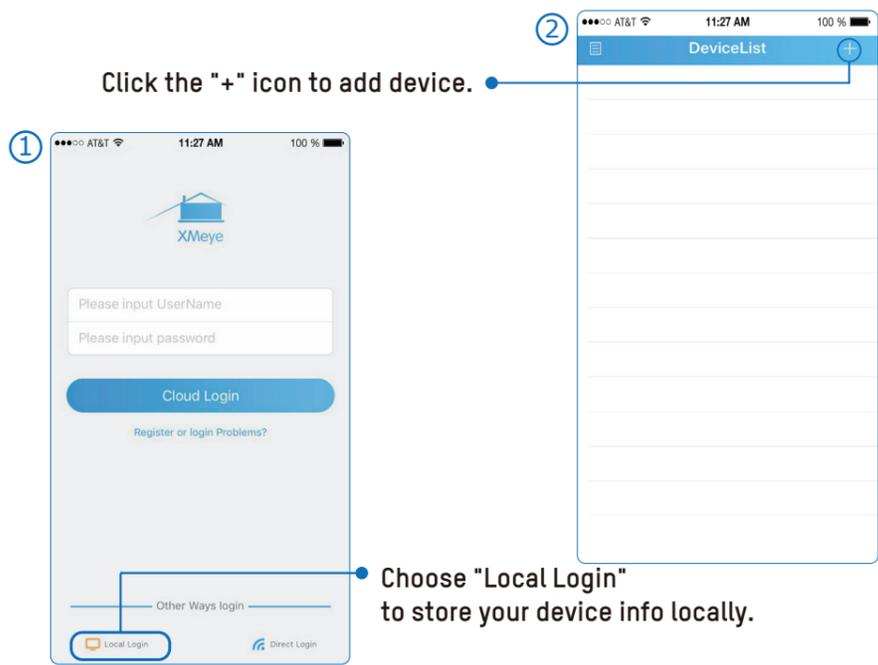


Click the "+" icon to add device.

Choose "Local Login" to store your device info locally.

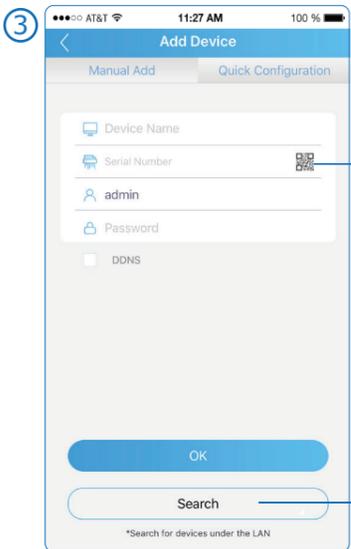


Remote or with 4G: manually scan the camera QR code to add device.

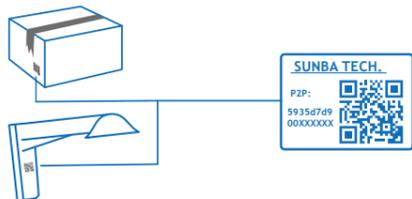

The app automatically shows all Sunba devices in LAN.


Click the search icon if your camera and smartphone are connected to the same WiFi.

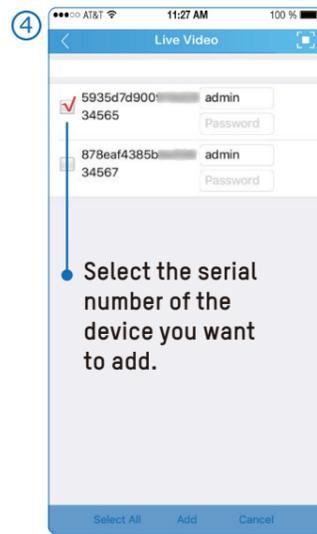

Select the serial number of the device you want to add.


Select channel.

Click for live view.

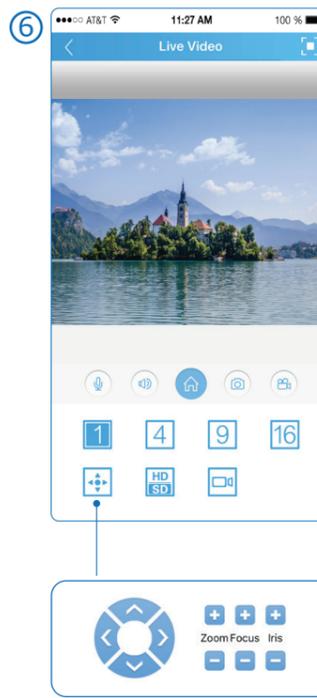

- Access camera main menu.
- Turn on speaker (if equipped).
- Turn on audio.
- Take a snapshot and save the image to your phone. Record a video and save the clip to your phone.
- 1** Single camera view.
- 4** 4-split view.
- 9** 9-split view.
- 16** 16-split view.
- Switch video stream quality.
- Check in-device playback (if TF card option is available).
- Return to previous menu.
- Switch to full screen view.
- Enable pan/tilt/zoom control.


5 Change Default Password

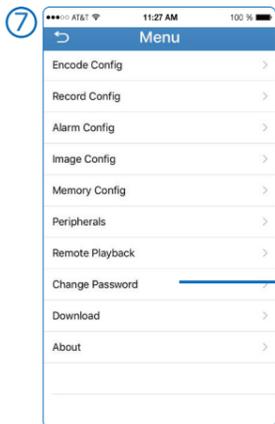


Click to enter device main menu. Select to change password. This is important to keep your account secure.



Hint: default old password is empty.

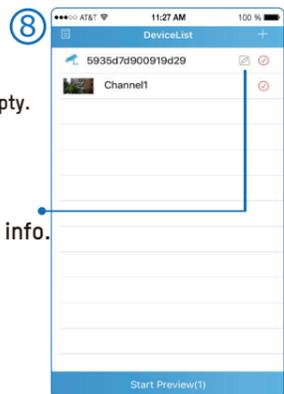


Click "edit" to enter the new password to your login device info.

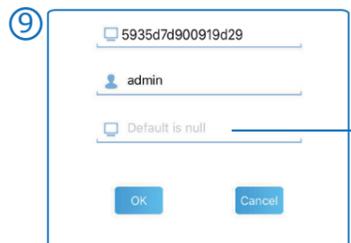

Enter the new password that you just modified.

6 Desktop Control




Video Tutorial

The default username/password for VMS software is admin/admin [PC] or admin/(null) [Mac].

Click to add device to the software. Then click to monitor. Click to configure advanced features of the camera.

Device Quick Setup

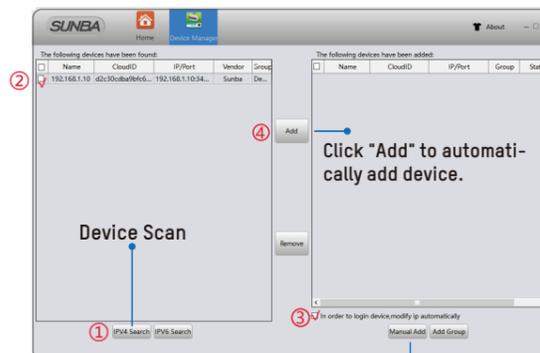

Click "Add" to automatically add device.

Manual Setup



Click "Manual Add" to manually add device.

Login using IP address or Serial Number (Cloud ID)

Enter password (default is blank). If you've already modified the password in Chapter 5, please enter your new password.

Select protocol. Use Sunba protocol by default.



Click to open PTZ

Double-click to display the live video

SUNBA

More Details?

Please contact support@sunba.net