


P636

PoE+ Outdoor 5MP 36X Starlight IR PTZ Network Camera - IP66

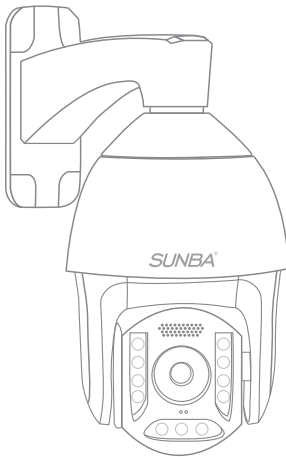

- 5MP(2592*1944)@25FPS, 3D Noise Reduction
- 36x Optical Zoom, 4.5mm-162mm
- 360°Pan & -15-90° Tilt, Privacy Mask, 3D Positioning
- Firefox/Chrome (in both Mac & Win) without plugin
- 120db WDR, Starlight Low Light Illumination
- Aperture Auto/Manual, Aperture Range: F1.5~F4.0
- Shutter Auto/Manual, Shutter Range: 1~1/100000s
- Power over Ethernet (802.3at)
- ONVIF 2.4 Compliant & RTSP Stream
- Support Micro SD storage, up to 256GB
- Customized Text & Image On-Screen-Display
- Scheduled/Timed/Event/Preset Capture
- H.265/H.264/MJPEG, Builtin Mic & Speaker(2-WayAudio)
- Self-Adaptive Switchable Tri-stream
- Smart IR, Up to 300m (1000ft) IR distance
- P2P Cloud (Guard viewer)
- Dimension 185(mm) x 316.5(mm)
- Net Weight 4.6kg(10.14lb)
- Wide temperature range: -35°C ~ 60°C (-31°F ~ 140°F)

Built-in Smart Analysis

Motion Detection - Detect moving object

Intrusion Detection - Detect trespassing object in a preset zone.

Sample application: private home yard, restricted area for personal in airport, factory and object left

Other facilities - Detect object left in the preset zone.

Sample application: airport luggage claim

Head Count - Count the number of real time people entered and exited

Sample application: traffic evaluation for business

Face Capture - Capture and store human faces captured by the camera

Sample application: important data if there is any potential critical activities / data resources for future facial recognition analysis for police

Line Cross Detection - Detect any object crossing a line

Sample application: cameras facing the gate to detect every entry

Object Removal - Detect any type of object removal in a preset zone

Sample application: museum and art exhibit

Security Measures

HTTPS web interface supported

Weak password detection and illegal login lock

RTSP access authorization required

802.1X authentication supported

Video trademark & waterproof supported

Support gateway-arp linkage to prevent from arp deception

IP filter

Ceiling Option (Sold Separately)

CM-601-5

